

C4L

Origin on the non-motor side is selectable



Ordering method

C4L							ERCD	
Model	Lead designation	Brake	Direction of air coupler installation	Origin position change	Stroke	Cable length ^{Note 1}	Controller	I/O connector specification
	12: 12mm 6: 6mm 2: 2mm	No entry: With no brake BK: With brake	L: Left (Standard) R: Right	None: Standard Z: Non-motor side	50 to 400 (50mm pitch)	1K: 1m 3K: 3.5m 5K: 5m 10K: 10m		CN1: I/O flat cable 1m (Standard) CN2: Twisted-pair cable 2m (pulse train function)

Note 1. The robot cable is flexible and resists bending. See P.596 for details on robot cable.

Basic specifications

AC servo motor output (W)	30
Repeatability ^{Note 1} (mm)	+/-0.02
Deceleration mechanism	Ball screw $\phi 8$
Ball screw lead (mm)	12 6 2
Maximum speed (mm/sec)	720 360 120
Maximum payload (kg)	Horizontal: 4.5, 6, 6 Vertical: 1.2, 2.4, 7.2
Rated thrust (N)	32 64 153
Stroke (mm)	50 to 400 (50mm pitch)
Overall length (mm)	Horizontal: Stroke+205 Vertical: Stroke+240
Maximum outside dimension of body cross-section (mm)	W45×H55
Cable length (m)	Standard: 3.5 / Option: 1.5, 10
Degree of cleanliness	ISO CLASS 3 (ISO14644-1) ^{Note 2}
Intake air (N _l /min) ^{Note 3}	50 30 15

Note 1. Positioning repeatability in one direction.

Note 2. CLASS 10 (0.1 μ m) FED-STD-209D or equivalent when a suction blower is used.

Note 3. The necessary intake amount varies depending on the use conditions and environment.

Allowable overhang ^{Note}

	Horizontal installation (Unit: mm)			Wall installation (Unit: mm)			Vertical installation (Unit: mm)		
	A	B	C	A	B	C	A	C	
Lead 12	2kg	429	87	179	2kg	145	52	368	
	4.5kg	219	32	74	4.5kg	46	0	139	
Lead 6	3kg	511	58	135	3kg	103	22	370	
	6kg	336	26	62	6kg	27	0	185	
Lead 2	3kg	1571	58	142	3kg	109	23	1150	
	6kg	751	27	66	6kg	27	0	420	

Note. Distance from center of slider top to center of gravity of object being carried at a guide service life of 10,000 km.

Note. Service life is calculated for 300mm stroke models.


Static loading moment

(Unit: N·m)		
MY	MP	MR
15	19	18

Controller

Controller	Operation method
ERCD	Pulse train control / Programming / I/O point trace / Remote command / Operation using RS-232C communication

C4L

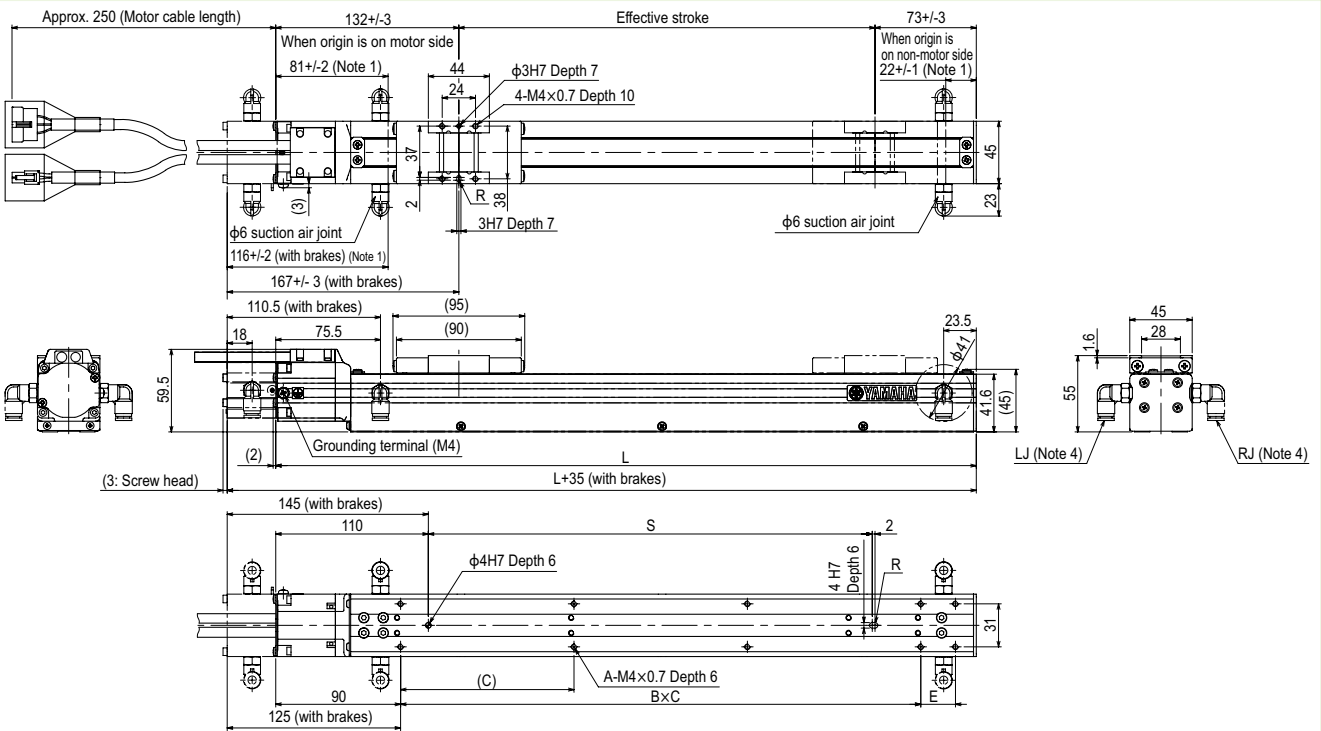

Effective stroke	50	100	150	200	250	300	350	400
L	255	305	355	405	455	505	555	605
A	4	6	6	8	8	10	10	10
B	1	2	2	2	2	3	3	4
C	150	100	125	125	125	125	125	125
E	0	0	0	50	100	25	75	0
S	70	120	170	220	270	320	370	420
Weight (kg) ^{Note 3}	1.4	1.5	1.7	1.8	2	2.1	2.3	2.4
Maximum speed for each stroke (mm/sec)	Lead 12	720						
	Lead 6	360						
	Lead 2	120						

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. Minimum bend radius of motor cable is R30.

Note 3. Weight of models with no brake. The weight of brake-attached models is 0.2 kg heavier than the models with no brake shown in the table.

Note 4. Either right or left can be selected for the installation direction for the $\phi 6$ intake air joint. (The left side is the standard.)

Note 5. External view of C4LH is identical to C4L.